Sealant

Backer Rod

Perforated Trim Piece

ZIP System R-sheathing

ZIP System Rainscreen

Lath

Stucco Scratch and Brown Coat

Stucco Finish Coat
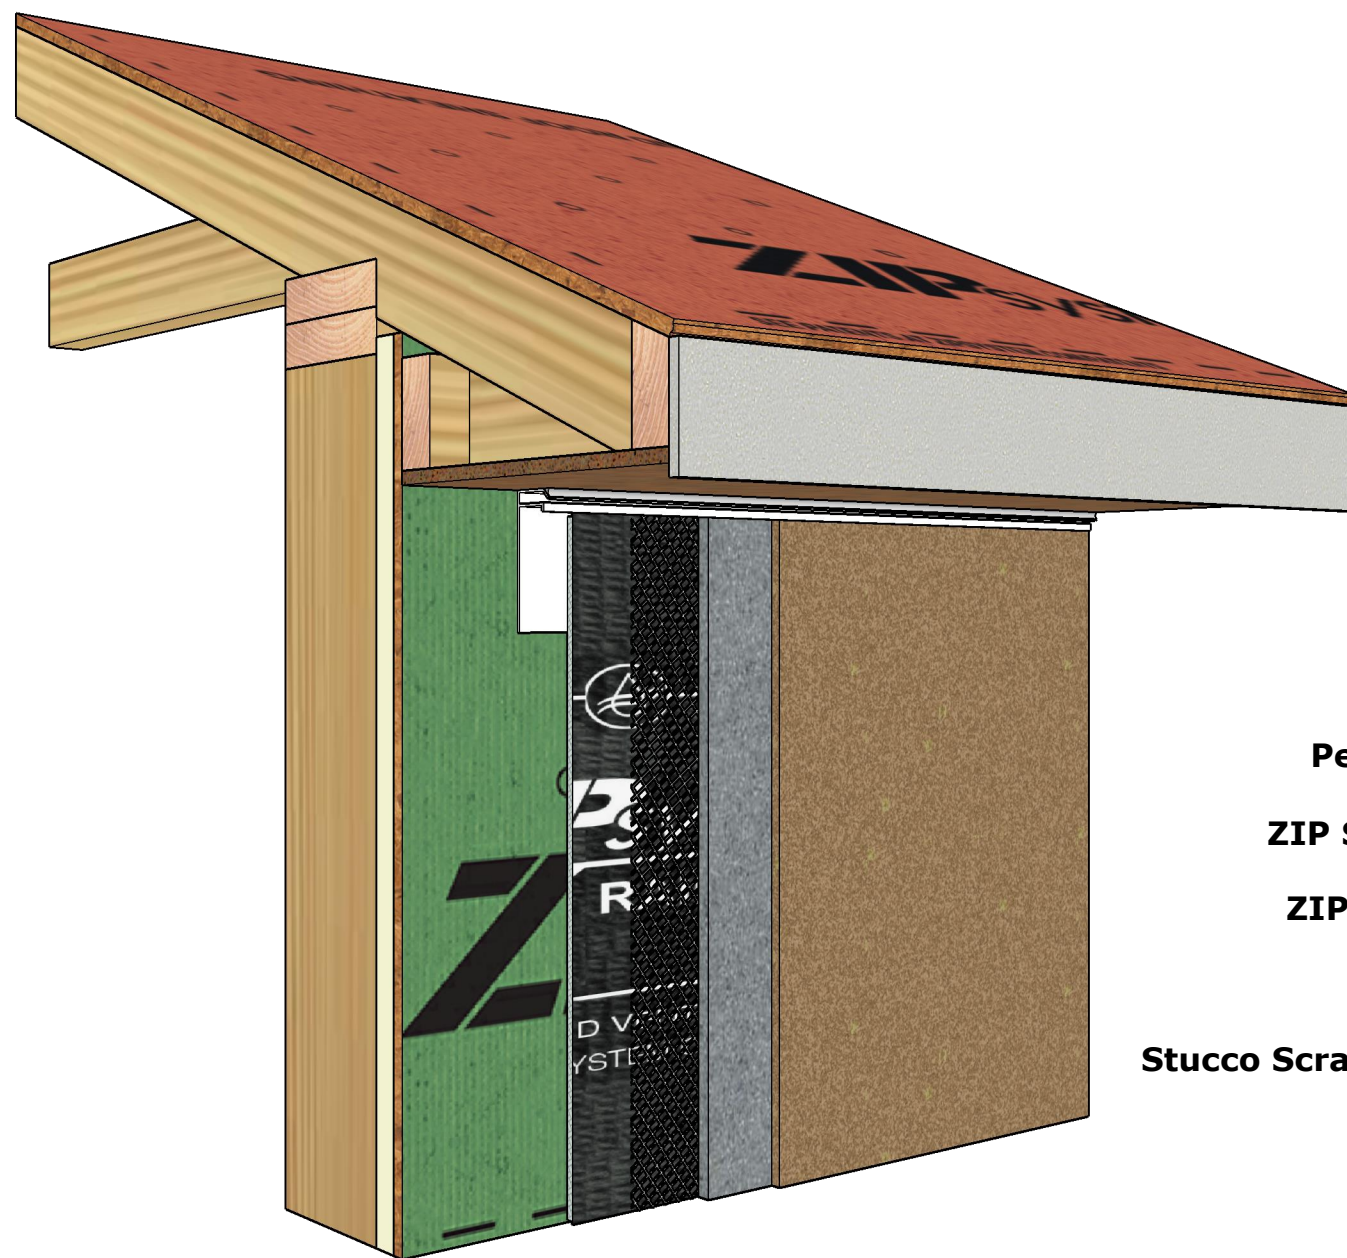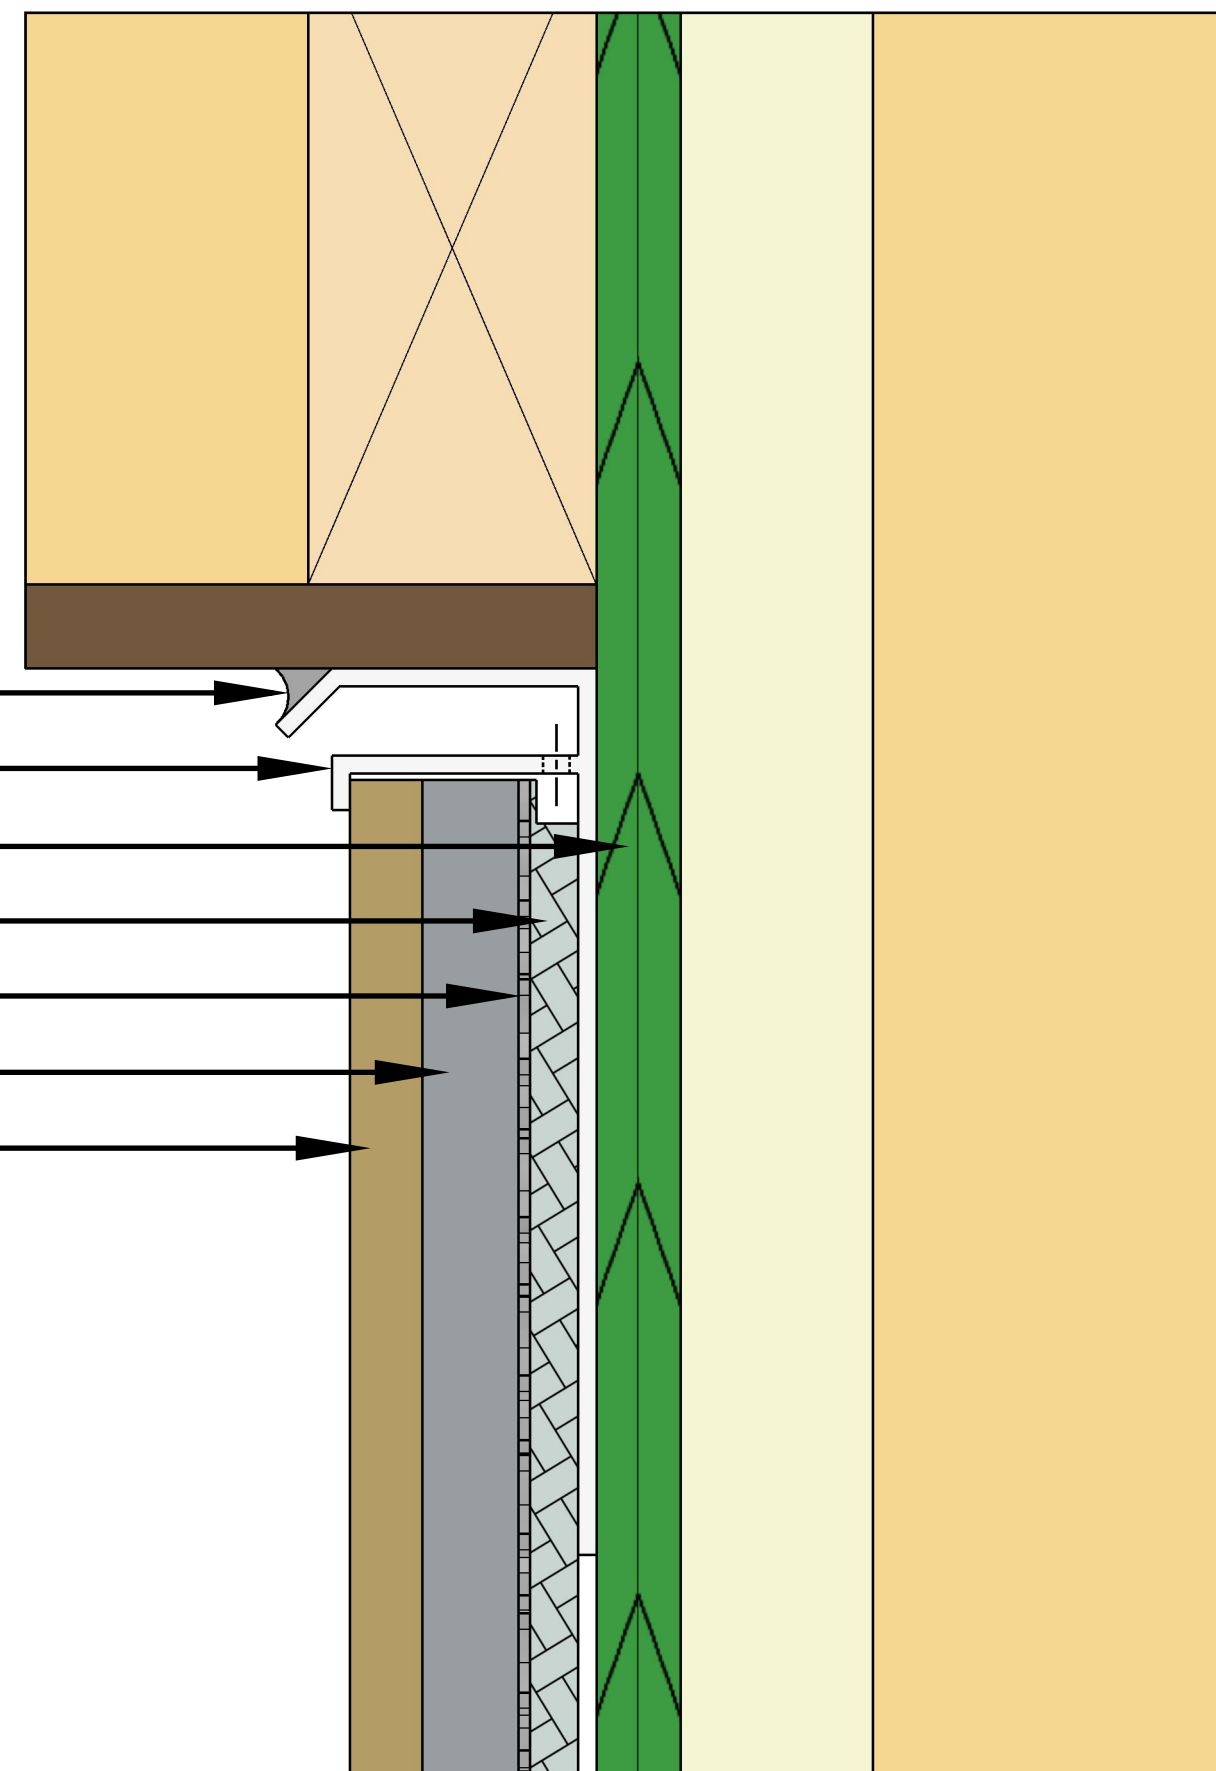
* Tape all ZIP System R-sheathing panel seams and roll the tape.

* Tape all vertical seams of ZIP System rainscreen.

* The trim piece at the top of the wall should be perforated to allow the transmission of air and water vapor

* (Optional) Install a bug guard along the bottom of ZIP System rainscreen.

-TOP OF WALL FLASHING DETAIL WITH STUCCO- ZIP SYSTEM RAINSCREEN AND ZIP SYSTEM R-SHEATHING UNDER PERFORATED TRIM WITH BACKER ROD AND SEALANT

ZIPsystem™
RAINSCREEN

Sealant

Perforated Trim Piece

ZIP System R-sheathing

ZIP System Rainscreen

Lath

Stucco Scratch and Brown Coat

Stucco Finish Coat

* Tape all ZIP System R-sheathing panel seams and roll the tape.

* Tape all vertical seams of ZIP System rainscreen.

* The trim piece at the top of the wall should be perforated to allow the transmission of air and water vapor

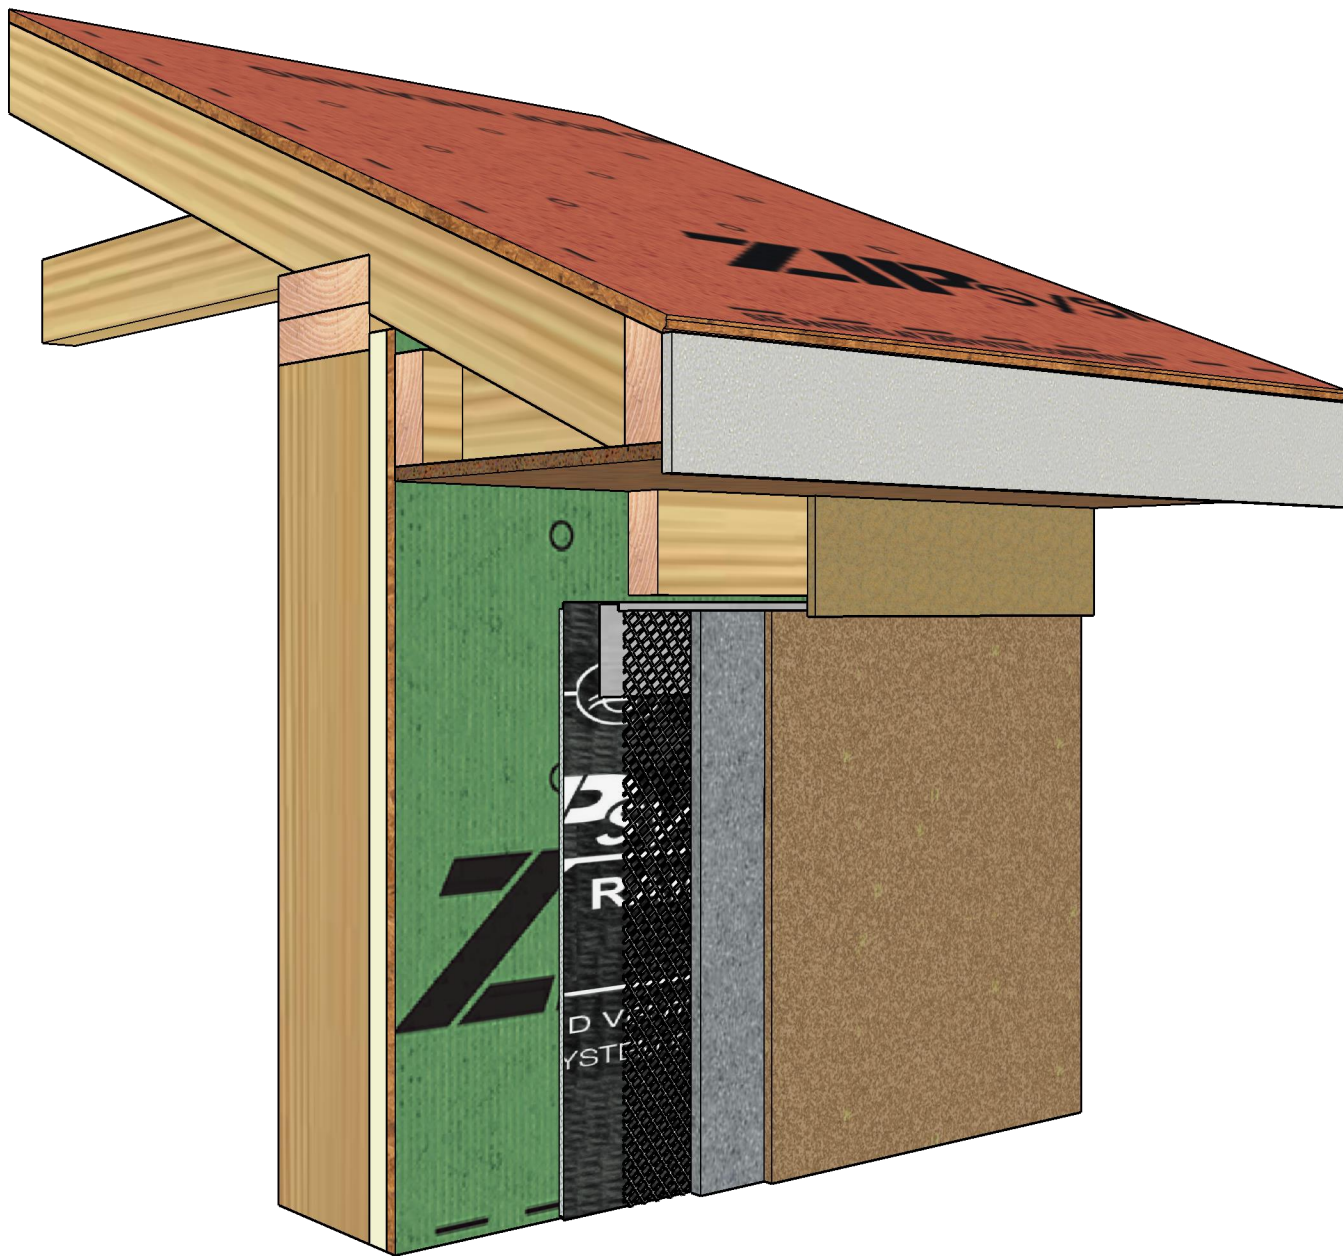* (Optional) Install a bug guard along the bottom of ZIP System rainscreen.

-TOP OF WALL FLASHING DETAIL WITH STUCCO-
ZIP SYSTEM RAINSCREEN AND ZIP SYSTEM R-SHEATHING
UNDER PERFORATED TRIM WITH SEALANT

ZIPsystem™
RAINSCREEN

ZIP System Sheathing

Blocking

Decorative Trim

Minimum 1/4-Inch

Stucco Trim

ZIP System Rainscreen

Lath

Stucco Scratch and Brown Coat

Stucco Finish Coat

* Tape all ZIP System R-sheathing panel seams and roll the tape.

* Tape all vertical seams of ZIP System rainscreen.

* Provide enough clearance between the top-of-wall trim and blocking to allow the transmission of air and water vapor.

* (Optional) Install a bug guard along the bottom of ZIP System rainscreen.

-TOP OF WALL FLASHING DETAIL WITH STUCCO-
ZIP SYSTEM RAINSCREEN AND ZIP SYSTEM R-SHEATHING
WITH BLOCKED TRIM AND AIR/VAPOR GAP

ZIPsystem™
RAINSCREEN