



**LAYERS OF PROTECTION:  
ZIP SYSTEM™ ROOF ASSEMBLY  
LEAK-FREE GUARANTEE\***

When you register and combine revolutionary ZIP System® sheathing, tape and peel and stick underlayment, you can receive multiple layers of protection against damaging water leaks that can occur from ice or wind-driven rain. Register your eligible project at: [LeakFreeGuarantee.co/Register](https://LeakFreeGuarantee.co/Register)

Roof assemblies built with ZIP System® sheathing and tape or ZIP System™ peel and stick underlayment may be eligible for designation as a FORTIFIED Roof™ sealed roof deck. FORTIFIED™ is a voluntary set of above-code design, building and retrofitting standards developed by the Insurance Institute for Business & Home Safety to strengthen homes against severe weather. A FORTIFIED Roof™ designation requires a successful evaluation and compliance with all IBHS program requirements. IBHS is not responsible or liable for the performance of ZIP System™ products. [Learn more at Fortifiedhome.org/roof](https://Fortifiedhome.org/roof).



**LEAK-FREE GUARANTEE\***  
WHEN USED WITH  
**ZIP SYSTEM® SHEATHING AND TAPE**



**SEALS AROUND  
NAILS**




**SLIP-RESISTANT**



**AVAILABLE IN  
STANDARD AND HIGH  
TEMP FORMULATIONS**

\*Registration Required. Leak-Free Guarantee applies only when using a ZIP System Roof Assembly. See [LeakFreeGuarantee.co](https://LeakFreeGuarantee.co) for details and the definition of a ZIP System Roof Assembly.

- Use to meet code requirements for ice barrier or as a roofing underlayment in accordance with ESR-4904
- High-performance self-adhered rubberized asphalt product that seals around nails
- Embedded pull cord splits liner on demand
- Use to protect areas at risk of leaks or water damage due to ice dams or wind-driven rain, such as at eaves and valleys, or in entire roof applications
- Tested in accordance with ASTM D 1970
- Slip-resistant surface for ease of application
- Waterproofing roof underlayment

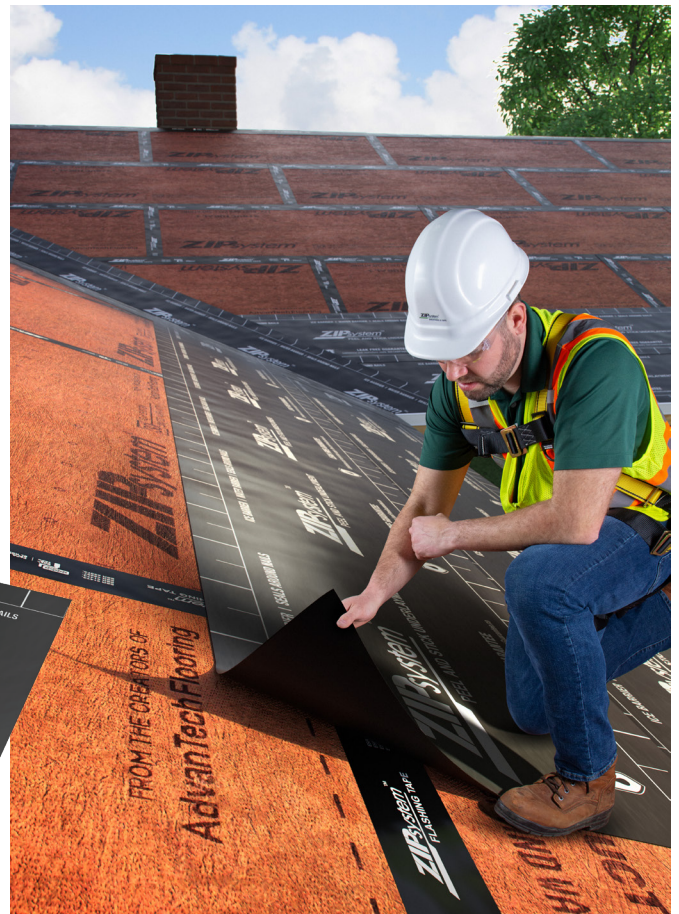

**LEAK-FREE GUARANTEE\***  
WHEN USED WITH ZIP SYSTEM® SHEATHING AND TAPE

\*Registration Required. Leak-Free Guarantee applies only when using a ZIP System Roof Assembly. See [LeakFreeGuarantee.co](http://LeakFreeGuarantee.co) for details and the definition of a ZIP System Roof Assembly.

## ZIP SYSTEM™ PEEL AND STICK UNDERLAYMENT

TYPE	TOTAL COVERAGE	WIDTH	ADHESIVE TECHNOLOGY	CODE EVALUATION REPORT	SERVICE TEMPERATURE APPLICATION	EXPOSURE	PERMEANCE
Standard	200 ft <sup>2</sup>	36" x 66'	Rubberized Asphalt	ESR-4904	180° F	90 days	ASTM E96 ≤ 0.05 perms
High Temperature					260° F	120 days	