


ZIPsystemTM
R-SHEATHING



The Front

FIGHTS AIR AND MOISTURE.

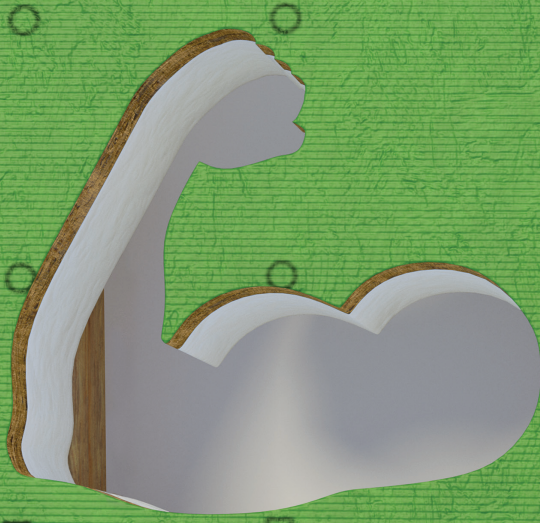

NON-RESIDENTIAL
AND RESIDENTIAL
> 3 STORIES




The Back

FIGHTS HEAT AND COLD.

TOGETHER, THEY KNOCK OUT THE ELEMENTS.

ZIP System® R-sheathing is the simple all-in-one structural panel with built-in exterior insulation. Featuring integrated moisture, air and thermal protection, ZIP System R-sheathing completely reimagines traditional wall assemblies by streamlining exterior water, air and thermal management. Learn how to protect your next project at [InsulateYourBuild.com](https://www.insulateyourbuild.com).



BUILT-IN EXTERIOR INSULATION

Designed to meet new energy codes, each panel features integrated continuous foam insulation to increase thermal performance and minimize thermal bridging.



STRUCTURAL DURABILITY

An exterior engineered wood panel meets wall bracing requirements, contributes to shear wall designs and provides a nailable, flashable base for cladding, trim and windows.



INTEGRATED WATER-RESISTIVE BARRIER

A built-in water-resistive barrier can eliminate the need for housewrap and helps achieve a quick rough dry-in backed by a 180-day Exposure Guarantee and 30-year Limited Warranty.*



CONTINUOUS AIR BARRIER


Taped seams create a continuous air barrier that helps prevent air leakage and protects insulation R-value as part of an energy-efficient enclosure.



* Limitations and restrictions apply. View the ZIP System Wall Residential Warranty at [huberwood.com/residential-warranties/zip-system-wall](https://www.huberwood.com/residential-warranties/zip-system-wall), and/or Commercial Warranty for ZIP System Wall at [huberwood.com/commercial-warranties/zip-system-wall](https://www.huberwood.com/commercial-warranties/zip-system-wall) for more details.


CHOOSE FROM FOUR THICKNESSES AND THREE SIZES – 8FT, 9FT AND 10FT – TO FIND THE RIGHT PANEL FOR YOUR JOB.

Whether you're building to meet new energy codes or higher thermal performance, ZIP System® R-sheathing has the continuous insulation solution for your project, no matter the region.

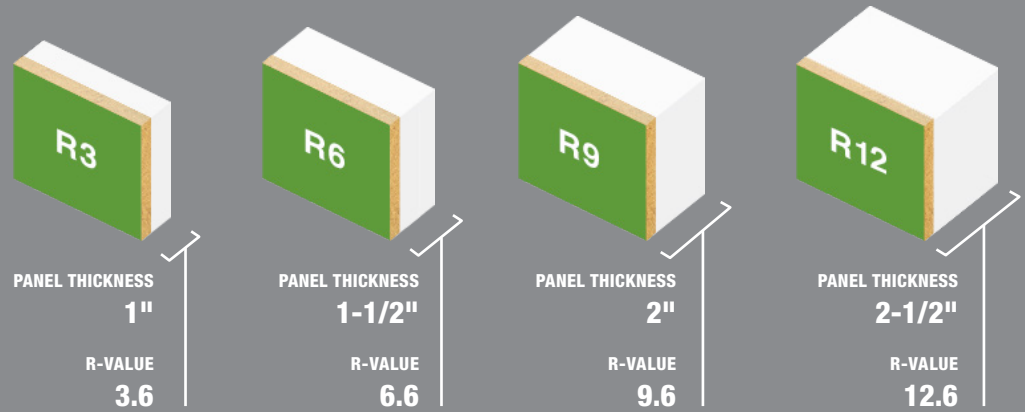

BUILD TO CODE IN ANY CLIMATE

INTERNATIONAL ENERGY CONSERVATION CODE (IECC) CLIMATE

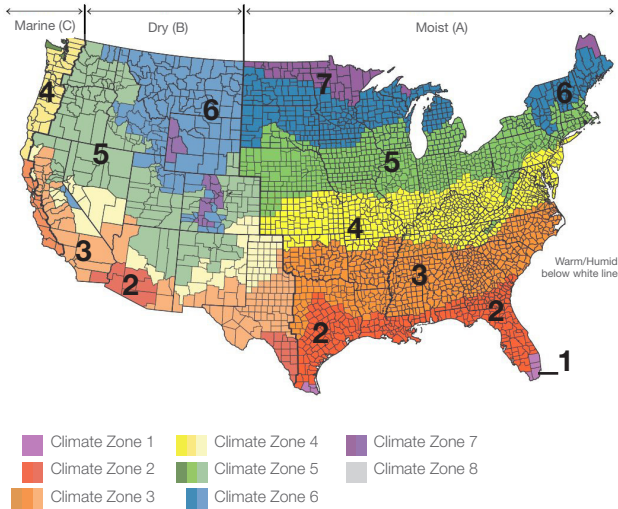

WOOD FRAMED WALLS R-VALUE REQUIREMENTS

CLIMATE ZONE	International Energy Conservation Code (IECC)				ASHRAE 90.1	
	2012, 2015, 2018 IECC		2021 IECC		2016, 2019, 2022	
	Residential	Non-Res	Residential	Non-Res	Residential	Non-Res
1	13+3.8 or 20	13+3.8 or 20	13+3.8 or 20	13+3.8 or 20	13	13
2	13+3.8 or 20	13+3.8 or 20	13+3.8 or 20	13+3.8 or 20	13	13
3	13+3.8 or 20	13+3.8 or 20	13+3.8 or 20	13+3.8 or 20	13+3.8 or 20	13
4	13+3.8 or 20	13+3.8 or 20	13+3.8 or 20	13+3.8 or 20	13+3.8 or 20	13+3.8 or 20
5	13+7.5 or 20+3.8	13+3.8 or 20	13+7.5 or 20+3.8	13+7.5 or 20+3.8	13+7.5 or 19+5	13+7.5 or 19+5
6	13+7.5 or 20+3.8	13+7.5 or 20+3.8	13+7.5 or 20+3.8	13+7.5 or 20+3.8	13+7.5 or 19+5	13+7.5 or 19+5
7	13+7.5 or 20+3.8	20+7.5 or 20+3.8	13+7.5 or 20+3.8	13+7.5 or 20+3.8	13+7.5 or 19+5	13+7.5 or 19+5
8	13+15.6 or 20+10	13+15.6 or 20+10	13+18.8	13+18.8	13+18.8	13+18.8

ZIP SYSTEM® R-SHEATHING FASTENING REQUIREMENTS FOR PRESCRIPTIVE BRACING^{1,2} AND ENGINEERED SHEAR WALL DESIGN³

ZIP System® R-sheathing Type	FRAMING		FASTENERS			SHEAR VALUES ⁴	
	Nominal Stud Spacing (min.)	Maximum Stud Spacing (in.)	Fastener Specifications ⁵	Edge/Field Spacing (in.)	Minimum Penetration into Framing (in.)	Allowable Seismic Controlled Shear Values ^{6,8} (plf)	Allowable Wind Controlled Shear Values ⁶ (plf)
R-3	2-by-4	24	0.131" shank nails	4/12	1.5	245	343
R-3	2-by-4	24	0.131" shank nails	3/12	1.5	280	392
R-3	2-by-4	16	16ga staples, 7/16" crown, 2" length	3/6	1.0	210	294
R-6	2-by-4	24	0.131" shank nails	4/12	1.5	230	322
R-6	2-by-4	24	15ga staples, 7/16" crown, 2.5" length	3/6	1.0	NA ⁷	NA
R-6	2-by-4	24	0.131" shank nails	3/12	1.5	255	357
R-9	2-by-4	24	0.131" shank nails	3/12	1.5	240	336
R-12	2-by-4	24	0.131" shank nails	3/12	1.5	215	301

* Limitations and restrictions apply. View the ZIP System Wall Residential Warranty at huberwood.com/residential-warranties/zip-system-wall, and/or Commercial Warranty for ZIP System Wall at huberwood.com/commercial-warranties/zip-system-wall for more details.

For SI: Inch = 25.4mm; 1 pound per foot (plf) = 14.59 N/m.

1. Prescriptive bracing requirements under the 2018, 2015, 2012, and 2009 IRC. 2. Not approved for use as prescriptive wall bracing where wind design is required by R301.2.1.1. 3. Engineered shear wall requirements with Douglas Fir-Larch Framing under the 2015, 2012, and 2009 IRC. 4. For framing with other than Douglas Fir-Larch, the shear value must be multiplied by the Specific Gravity Adjustment Factor = [1 - (0.50 - SG)], where SG=Specific Gravity of the framing lumber in accordance with the ANSI/AWC NDS. This adjustment factor must not be greater than 1. 5. Fasteners must be common nails or equivalent, or staples, of a type generally used to attach wood sheathing. 6. The shearwalls must have a maximum height-to-width aspect ratio of 2:1. 7. This panel and fastening configuration is only applicable to the prescriptive bracing requirements under the 2015 IRC. 8. ZIP System R-sheathing used as the lateral resistance system in seismic zones D_s, D₁, D₂, and E should be designed in accordance to ER-482. © 2018-2023 Huber Engineered Woods LLC. ZIP System®, logo and design are trademarks of Huber Engineered Woods LLC. Huber is a registered trademark of J.M. Huber Corporation. HUB 19256-001 REV 3/7/2023

