

ZIP SYSTEM™ FLASHING & STRETCH TAPES: NEW TAPE WIDTHS TO MEET YOUR NEEDS

SEAL TOUGH JOBS IN A FLASH.

An integral part of ZIP System™ roof and wall assemblies, ZIP System™ flashing tapes feature pressure-activated advanced acrylic adhesive. When used with ZIP System™ panels, ZIP System flashing tapes help form a strong, weather-resistant, continuous barrier backed by a 30-year Limited Warranty and 180-day Exposure Guarantee.¹

SINGLE PIECE INSTALLATION STRETCHES, CURVES, STICKS AND SEALS.

ZIP System™ stretch tape easily stretches to fit sills, curves and corners with a single piece without having to piece tape segments together. Made of a high-performance composite acrylic, the tape conforms to challenging applications and locks out moisture even over mismatched surfaces.




ZIP SYSTEM™ FLASHING TAPE

A	S-13773 ZIP System™ flashing tape 3 3/4" x 90'
NEW	S-20023 ZIP System™ flashing tape 3 3/4" x 30'
NEW	S-20008 ZIP System™ flashing tape 6" x 75'
NEW	S-20024 ZIP System™ flashing tape 9" x 50'
NEW	S-20025 ZIP System™ flashing tape 12" x 50'

ZIP SYSTEM™ STRETCH TAPE

NEW	S-20021 ZIP System™ stretch tape 3" x 20'
NEW	S-20022 ZIP System™ stretch tape 10" x 20'
NEW	S-20020 ZIP System™ stretch tape 6" x 20'
NEW	S-20010 ZIP System™ stretch tape 10" x 75'
H	S-20009 ZIP System™ stretch tape 6" x 75'

ZIP SYSTEM™ FLASHING & STRETCH TAPE

TYPE	NOMINAL WIDTH	ROLL LENGTH	TAPE THICKNESS	ADHESIVE TECHNOLOGY	CODE EVALUATION REPORT	INSTALLATION TEMPERATURE RANGE	EXPOSURE	TENSILE STRENGTH	ELONGATION
FLASHING TAPE	3-3/4"	30' 90'	12 mils	Acrylic	ESR 2227 AAMA 711: Pass	 COLD TEMPERATURE APPLICATION AS LOW AS 0°F	180 Days	938 psi	400 – 800%
	6"	75'							
	9"	50'							
	12"								
STRETCH TAPE	3"	20'	42 mils		ER 365 AAMA 711: Pass	0°F – 120°F		225 psi	800 – 1200%
	6"	20' 75'							
	10"								

1. Limitations and restrictions apply. Visit ZIPSystem.com for details.

ZIP SYSTEM™ LIQUID FLASH: NEW CARTRIDGE SIZE, SAME GREAT PRODUCT.

ENGINEERED FOR SEALING IRREGULAR, CURVED OR HARD TO FLASH AREAS.

ZIP System™ liquid flash is a liquid-applied flashing membrane made of STPE (silyl-terminated-polyether) technology. This high-performance formulation combines the durability of silicones with the toughness of urethanes.

A

S-20005
ZIP System™ liquid flash
29 oz. cartridge


B

S-20006
ZIP System™ liquid flash
20 oz. sausage

NEW

C

S-20018
ZIP System™ liquid flash
10.3 oz. cartridge

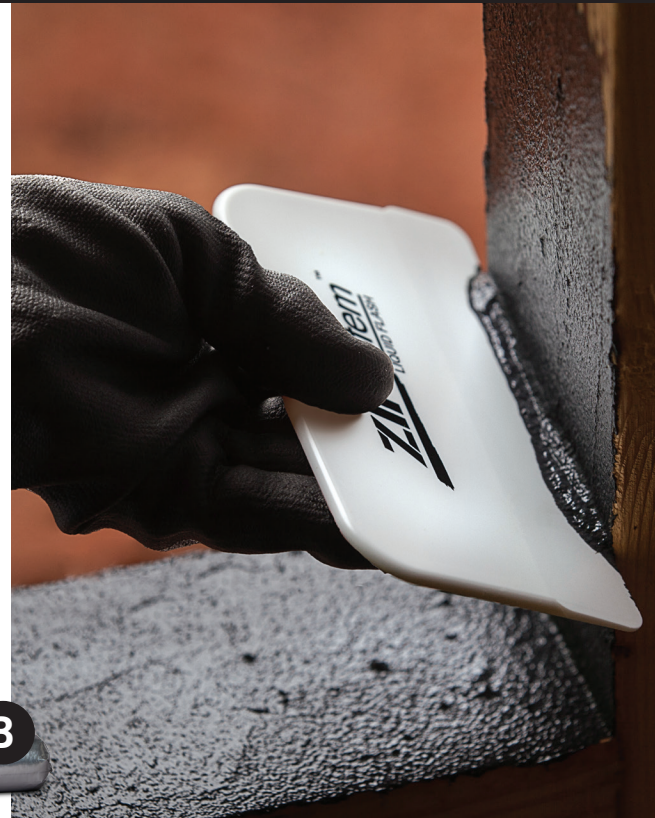

ZIP SYSTEM™ LIQUID FLASH

PACKAGING OPTIONS	TYPICAL COVERAGE: WINDOW SILL FLASHING (2X4 FRAMING)	CURED THICKNESS	COMPOUND TECHNOLOGY	WATER AND AIR PENETRATION	INSTALLATION TEMPERATURE RANGE	EXPOSURE	TACK FREE TIME	CURE TIME
29 oz. Cartridge	29 lf (approx. nine 3'0" window sills)	12 mils	STPE Polymer	ASTM E331: Pass ASTM E2357: Pass	35°F – 110°F	180 Days	20 - 40 min. ¹	12 mils = 4 Hours ¹
20 oz. Sausage	20 lf (approx. six 3'0" window sills)							
10.3 oz. Cartridge	10 lf (approx. three 3'0" window sills)							

¹ At 70°F and 50% relative humidity. Low temperatures and low relative humidity slow dry time; high temperatures and high relative humidity accelerate dry time.
© 2019-2020 Huber Engineered Woods LLC. ZIP System and the ZIP System logo are trademarks of Huber Engineered Woods LLC. HUB 81905 REV 1/20

THE ZIP SYSTEM™ TAPE ROLLER TAKES THE GUESSWORK OUT OF SEAM SEALING

This newest innovation from the ZIP System® sheathing and tape line of products is designed to give you a visual indicator where tape has been rolled. The split-neck roller design allows for easy rolling access in tough-to-reach spots such as inside corners and around windows and doors.



"Z" Impression

Leaves "Z" impression where tape has been rolled



Long-Reach Handle

Easy rolling for hard-to-reach spots



Functional Design

Designed for optimal pressure application



Wide Roller Head

Cover more area with each application



NEW VISUAL INDICATOR